


Design Kbs 41 94 333 0 001/084 *

Series Kbs 41 94 333 0 001/092 **

Kbs with fixed stanchion for logs

MEDWAY

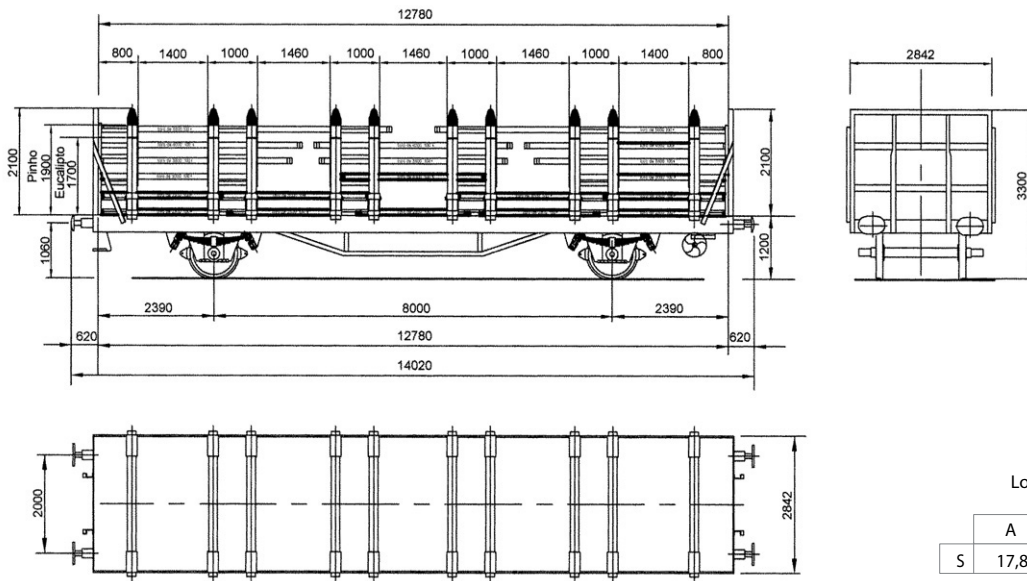

Load Limits *

	A	B	C
S	17,8	21,8	25,8

Load Limits **

	A	B	C
S	15,7	19,7	23,7

Technical Data :

Max. Load 25.800 Kg*
23.700 Kg**

Floor Space 33m²

Obs.:
Possible Load Configuration (pincers <= 1,20m):

- 5 stows of 2,30m
- 3 stows of 3,00m
- 3 stows of 3,80m
- 3 stows of 4,00m
- 2 stows of 5,60m
- 2 stows of 2,30m + 2 of 3,00m
- 2 stows de 2,30m + 2 de 3,80m

Stows dimension has a tolerance of + or - 0,1

Other Technical Data :

Builder	Simmering
Construction Year	1970
Modified by	CP/Emef
Modification year	2005
Max. Speed	100km/h
Medium Tare	14.200 Kg* / 16.300 Kg**
Wheels	ø 1000mm
Axle Bearing	Roller Bearing
Axle Journal	130x217mm
KE GP Brake	17-26t
Max. Hand Brake	21t
Brake Changeover	22t
Cylinders	1x12"
Brake-rod adjuster	DRV 2A - 450
Triple Valve	KE 1c SL* / C3W LV GP**
Unloaded - loaded box	LS3-KA TYPE
Unloaded - loaded valve	MV Type